

Product Description


Illuminate and view into your vessel through one port, with a fiber optic Flexlight Bundle.

Features

- 80 Watt high output light
- Ideal for glass-lined reactors
- Integral transformer and light source
- 5 minute - 3 hour timer (standard)
- Supplied with the Canty cold light
- Available in three lengths: 12", 36" & 72"
- Featuring a high output bulb and reflector assembly that focuses the light from the bulb into the vessel. An IR filter is used to remove unwanted heat from the light, eliminating product bake-on and delivering cool, effective light into your process.
- Flexlight Bundle is supplied with a USA explosion proof rating.

Options

- Mounting brackets – to connect Flexlight Bundle to an existing stud of sight glass.
- Various interlocking selections for the Quickport are available at an additional charge.

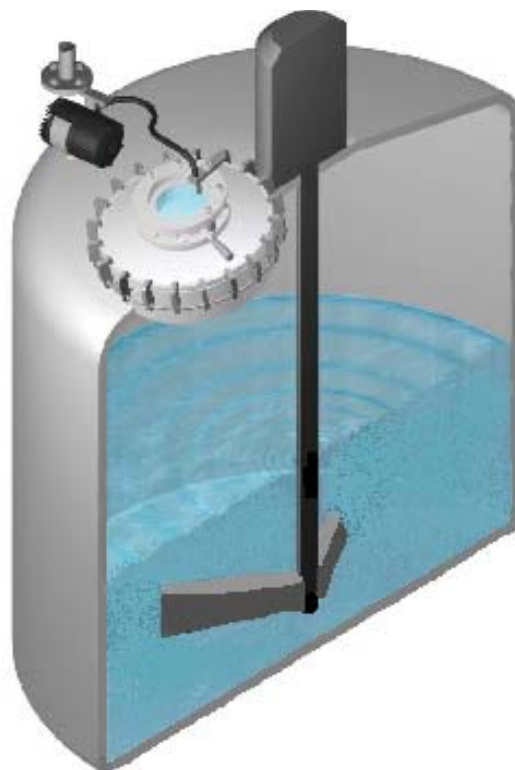


FLEXLIGHT BUNDLE PART NUMBERS

<u>Size</u>	<u>Part Number</u>
12" Flexlight Bundle (rigid SS)	FLB12
36" Flexlight Bundle	FLB36
72" Flexlight Bundle	FLB72


MOUNTING BRACKET PART NUMBERS

<u>Size</u>	<u>Part Number</u>
12" Flexlight	FLBMB12
36" or 72" Flexlight	FLBMB36/72



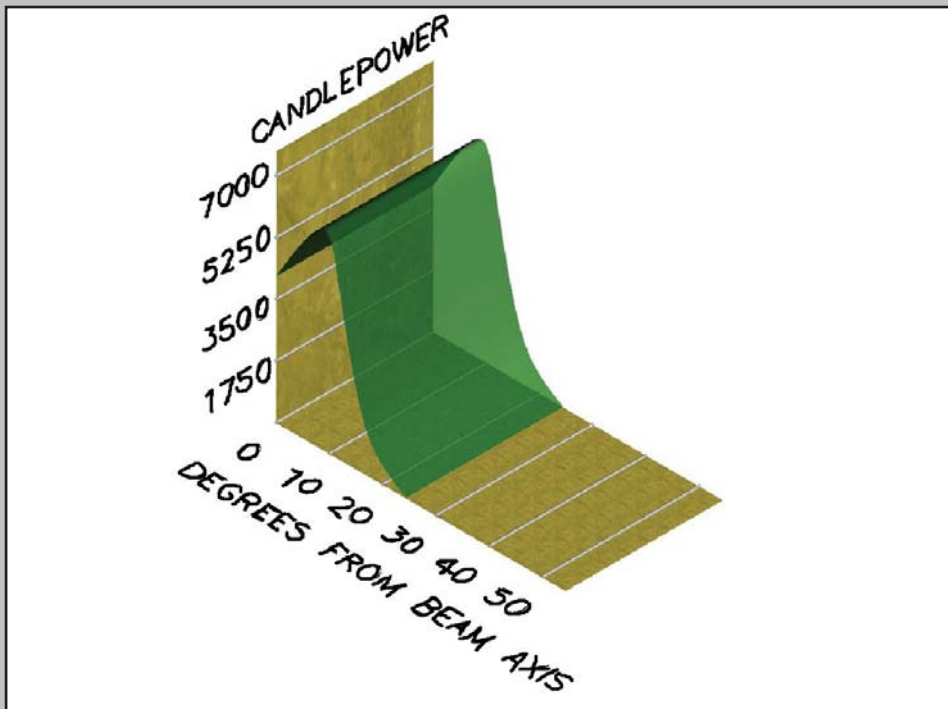

Light output distribution chart

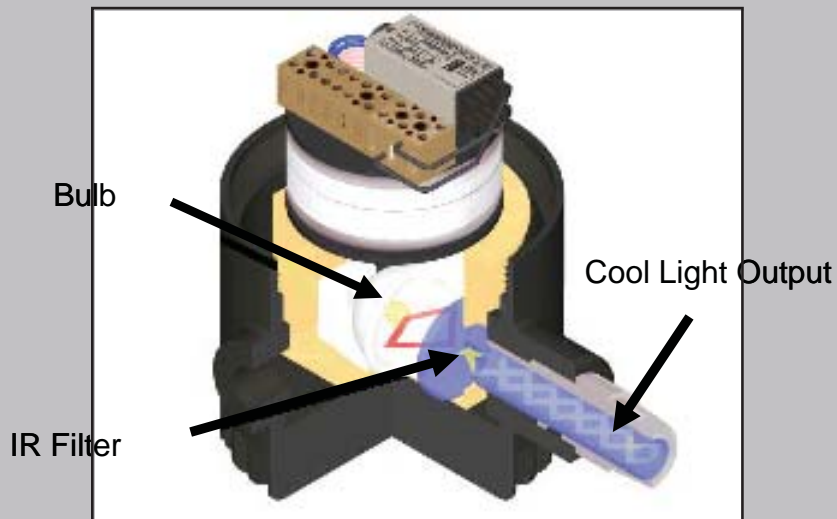

De Dietrich Process Systems, Inc.

244 Sheffield Street
Mountainside, NJ 07092

P 908.317.2585
F 908.889.4960

www.ddpsinc.com
sales@ddpsinc.com